




Premier Series

Self Contained Hot Water Washer






The Premier Series provides the highest level of quality & performance available in the industry today.

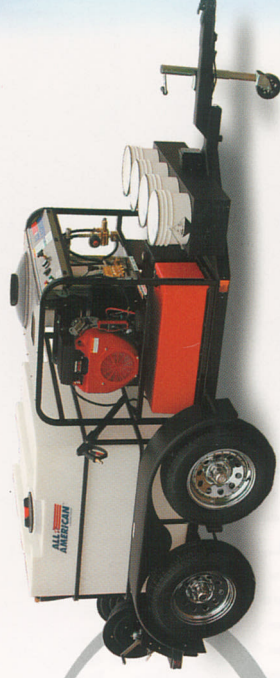

The Premier Series is compatible with all Streamliner trailers.

All major components are mounted for servicing convenience, with no panels to remove.

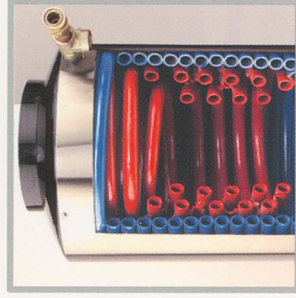

COIL SYSTEM

Our exclusive "Cool Touch Coil" actually forms the combustion chamber, eliminating troublesome insulation and outside hot spots. It also allows for better air flow which in turn provides better fuel combustion and efficiency.



ACCUMULATOR ASSEMBLY

The All American Accumulator Assembly effectively manages high-pressure flow conditions that may ordinarily cause system failure.



UNLOADER ASSEMBLY

Heavy-duty mounting of the pressure regulating valve eliminates fitting fatigue.



PUMP ASSEMBLY

Heavy-duty triplex plunger pump for years of dependable service.

MODEL #	GPM	PSI	HP	ENGINE	BURNER	COIL	BURNER PRESSURE ATOMIZING	FUEL CONSUMPTION	TEMPERATURE RISE	DIMENSION	WEIGHT
PH5030V80F	5.0	3000	16	VANGUARD	OIL FIRED	158", 1/2", Schedule 80	315,000 BTU 12 Volt	2.25 GPH	115°	48"L x 36"W x 40"H	870 LBS
PH5030V60D	5.0	3000	18	VANGUARD	OIL FIRED	158", 1/2", Schedule 80	490,000 BTU 115 Volt	3.50 GPH	140°	48"L x 36"W x 40"H	870 LBS
PH5030V60D	5.0	3000	18	KOHLER	OIL FIRED	158", 1/2", Schedule 80	490,000 BTU 115 Volt	3.50 GPH	140°	48"L x 36"W x 40"H	870 LBS
PH5030V80F	5.0	3500	18	KOHLER	OIL FIRED	158", 1/2", Schedule 80	315,000 BTU 12 Volt	2.25 GPH	115°	48"L x 36"W x 40"H	870 LBS
PH5035V60D	5.0	3500	20	HONDA	OIL FIRED	158", 1/2", Schedule 80	490,000 BTU 115 Volt	3.50 GPH	140°	48"L x 36"W x 40"H	870 LBS
PH5035V60F	5.0	3500	20	HONDA	OIL FIRED	158", 1/2", Schedule 80	315,000 BTU 12 Volt	2.25 GPH	115°	48"L x 36"W x 40"H	870 LBS
PH8030V60D	8.0	3000	24	HONDA	OIL FIRED	240", 1/2", Schedule 80	560,000 BTU 115 Volt	4.00 GPH	140°	48"L x 36"W x 40"H	960 LBS
PH5035V60D	5.2	3500	24	LOMBARDINI	OIL FIRED	158", 1/2", Schedule 80	490,000 BTU 115 Volt	4.00 GPH	140°	76"L x 46"W x 60"H	1100 LBS
PH5035V60D	5.0	3500	18	KOHLER	PROPANE	158", 1/2", Schedule 80	490,000 BTU 115 Volt	LP - 5.4 GPH	125°	48"L x 36"W x 40"H	870 LBS
PH5030V80F	5.0	5000	25	KOHLER	OIL FIRED	158", 1/2", Schedule 160	315,000 BTU 12 Volt	2.25 GPH	115°	48"L x 54"W x 40"H	960 LBS